


### Hexagon Bolt - ISO 4014


#### Technical Specification

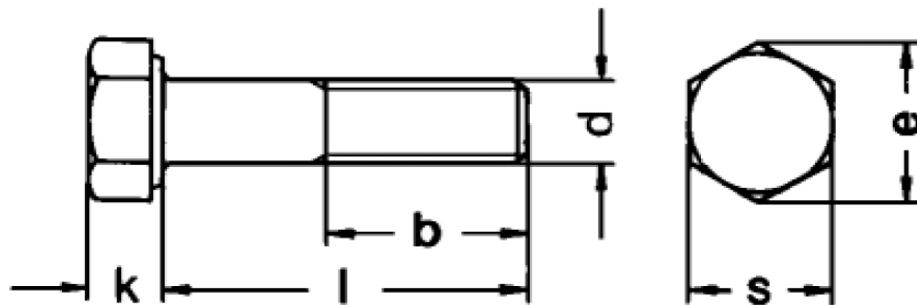

Part No.	ISO Type No.	d [mm]	k [mm]	l [mm]	b [mm]	s [mm]	e [mm]
AHM-SBC-100	M10 x 50 - 8.8	10.0	6.4	50.0	26.0	17.0	18.9

### Hexagon Bolt - ISO 4017


#### Technical Specification

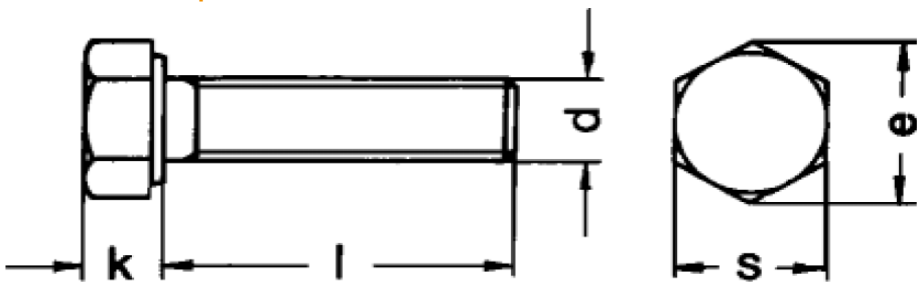

Part No.	ISO Type No.	d [mm]	k [mm]	l [mm]	s [mm]	e [mm]
AHM-SBC-200	M10 x 50 - 8.8	10.0	6.4	50.0	17.0	18.9

### Hexagon Nut - ISO 4032

#### Technical Specification

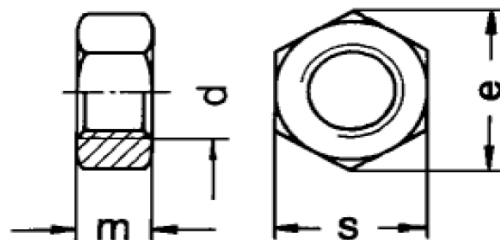

Part No.	ISO Type No.	d [mm]	m [mm]	s [mm]	e [mm]
AHM-SBC-300	M10 - 8	10.0	8.0	17.0	18.9

### Material Specification - ISO 4014, 4017 & 4032

Nominal tensile strength	: 800 N/mm <sup>2</sup>
Nominal yield strength	: 640 N/mm <sup>2</sup>
Proving test strength	: 580 N/mm <sup>2</sup>
Ultimate strain	: 12 %
Elasticity modulus E (tensile and compression)	: 210 N/mm <sup>2</sup>
Hardness	: 200 – 300 HV 30
Density	: 7.8 g/cm <sup>3</sup>

Siem Offshore Contractors GmbH  
 Bavinkstrasse 23 - Block E  
 D-26789 Leer / Germany  
 Tel.: +49 (0)491 20980 500  
 Fax: +49 (0)491 20980 509  
 Email: info@ahmtec.de  
 Web: www.ahmtec.de

**AHMTEC**  
 cable protection systems